



## 屈曲アンテナ


### TB4-900D-SMA

- ◆Tilt Base type Omni Antenna
- ◆High Performance



#### <SPECIFICATION>

Frequency 890 ~ 960 MHz  
 VSWR Less than 2.0  
 Impedance 50 Ω  
 Gain 1 dBi (peak)  
 Polarization Vertical  
 Power Input(max.) 1W  
 Dimensions 221 ± 3mm  
 Weight 33g  
 Connector SMA-male  
 Sleeve Urethane  
 Operating Temp -30~ +70°C

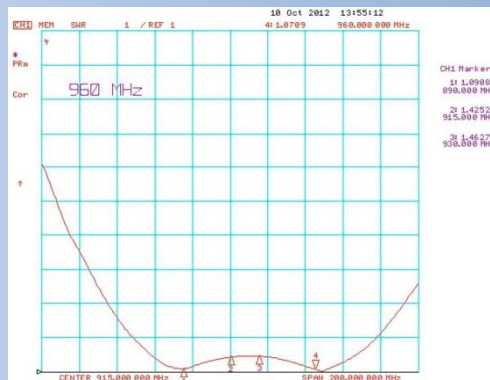


### TB-2400/5000

- ◆Tilt Base type Omni Antenna
- ◆Dual Wide Band
- ◆Compact Size
- ◆High Performance



#### <SPECIFICATION>

Frequency 2400~25000MHz & 5150~5350MHz & 5700~5850MHz  
 VSWR Less than 2.0  
 Impedance 50 Ω  
 Gain 2 dBi (peak)  
 Polarization Vertical  
 Power Input(max.) 5W  
 Dimensions 100mmx11φ  
 Weight 15g  
 Connector SMA-male  
 Sleeve Nylon  
 Operating Temp -30~ +60 °C

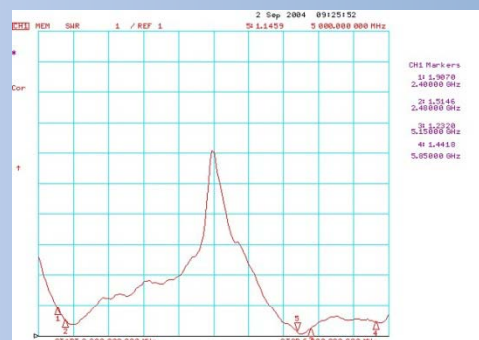

### TB-700/2700-SMA

- ◆Tilt Base type Omni Antenna
- Tilt Angle 0°, 45° & 90°
- ◆High Performance



#### <SPECIFICATION>

Frequency 698-960 & 1710-2700MHz  
 VSWR Less than 2.5  
 Impedance 50 Ω  
 Gain 2 dBi (peak)  
 Polarization Vertical  
 Power Input(max.) 10W  
 Dimensions 191x18x15mm  
 Weight 34g  
 Connector SMA -male  
 Sleeve & Base Nylon  
 Operating Temp -30 ~ +60°C

